

**TAMKO**<sup>®</sup>  
BUILDING PRODUCTS LLC



A BREATH  
OF FRESH AIR

**VENTILATION PRODUCTS**


CoolRidge<sup>®</sup> | Xtractor Vent<sup>®</sup> XLP Turbo | Roll Vent<sup>®</sup> | Rapid Ridge<sup>®</sup> | QuickVent<sup>®</sup>

## VENTILATION WITH CLEAN SIGHTLINES.

TAMKO offers several ridge ventilation products. Unlike some other ventilation options, TAMKO® products accent the ridge and eliminate unsightly vent caps to enhance visual curb appeal.

## THE IMPORTANCE OF PROPER VENTILATION.

Underventilated attic space can lead to higher utility bills and the accelerated aging of shingles. That's why proper roof ventilation is critical. A combination of properly installed and maintained continuous eaves and ridge vents helps promote draft ventilation from the bottom to the top of the attic space.

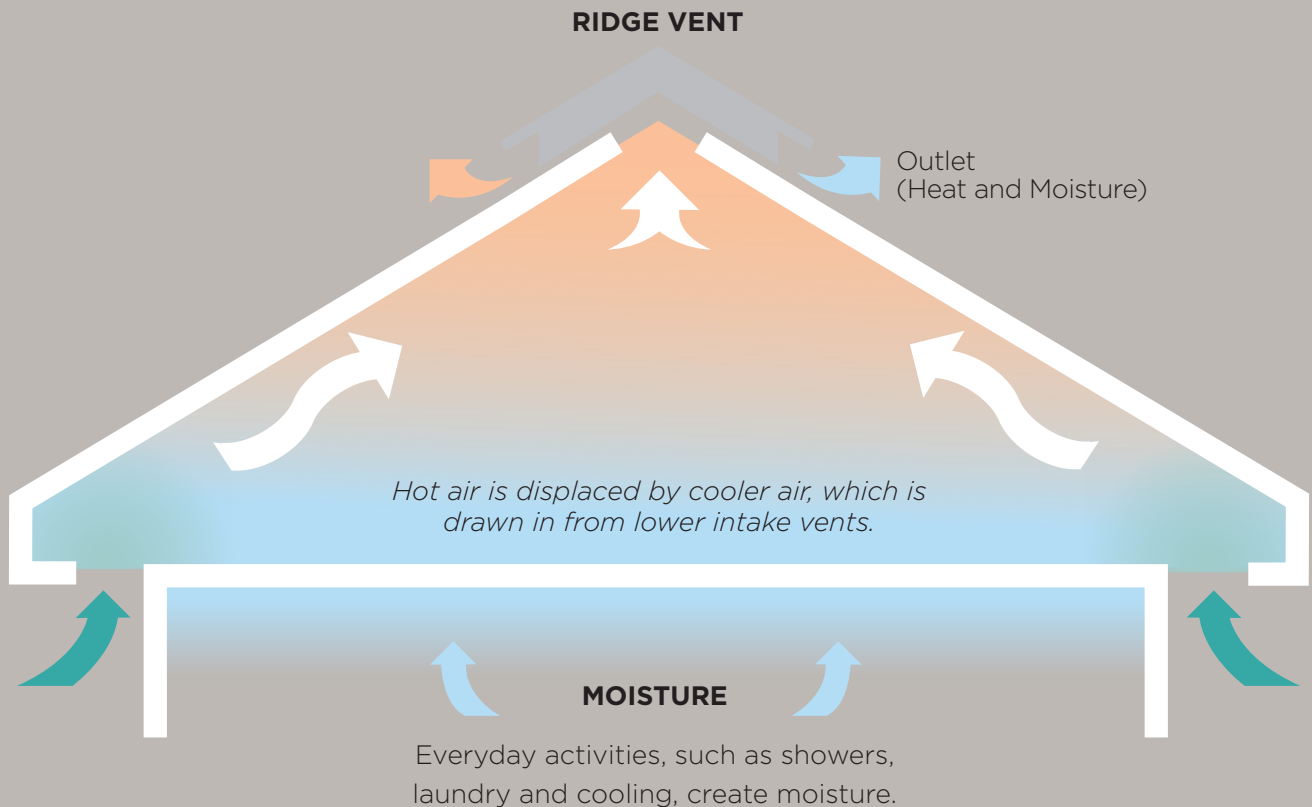

**Note: TAMKO products must be applied in accordance to the application instructions located on [tamko.com](http://tamko.com) and on the product wrapper. If conditions require special fastening methods, obtain written recommendations from TAMKO.**



[tamko.com](http://tamko.com)



## COOLRIDGE®

### SECTIONAL RIDGE VENT WITH EXTERNAL BAFFLES

- Injection-molded polypropylene in 4-foot sections.
- Integrated end plugs every 12".
- Internal supports in nail line area.
- Nails included.
- Embossed nail line and 1/2" nail zone area with clear space underneath.
- Exterior baffles and internal "sinewave"-shaped baffles.
- Available with an internal filter option.
- Male/female connection between pieces.
- Drain holes every 4" in exterior baffle.
- **Must be used with an equal or greater amount of soffit ventilation.**
- Florida Building Code approved.



CoolRidge

#### PRODUCT DATA\*

Width	14.75" (0.375 meters)
Length	48" (1.22 meters)
Thickness	13/16" (2.06 centimeters)
Weight without filter	33.6 lbs. per carton (15.24 kg)
Weight with filter	34 lbs. per carton (15.42 kg)
Color	Black
12 pieces per bundle=	48' per bundle
12 bundles per skid	576' per skid
Net free area per linear foot	18 square inches (116.1 square centimeters)

\*Subject to manufacturing variation.

VENTILATION PRODUCTS BEGIN TO AGE AS SOON AS THEY ARE EXPOSED TO NATURE. BUILDINGS EXPERIENCE AGING FACTORS DIFFERENTLY, SO IT IS DIFFICULT TO PREDICT HOW LONG VENTILATION PRODUCTS WILL LAST. THAT'S WHY TAMKO PROVIDES A LIMITED WARRANTY FOR MANY PRODUCTS, THAT INCLUDES A BINDING ARBITRATION CLAUSE AND OTHER TERMS AND CONDITIONS WHICH ARE INCORPORATED HEREIN BY REFERENCE. YOU MAY OBTAIN A COPY OF THE LIMITED WARRANTY AT TAMKO.COM OR BY CALLING 1-800-641-4691.

# XTRACTOR VENT® XLP TURBO

## NAIL GUN-ABLE CONTINUOUS RIDGE VENT WITH EXTERNAL BAFFLES

- Rolled ridge vent.
- Internal supports in nail line area.
- Nail gun-able installation with embossed nail line (1¾" coil nails included).
- Exterior baffles and internal "sinewave" -shaped baffles.
- Male/female connection between pieces.
- Vent holes are only 1/8" wide.
- Drain holes every 1/2" in exterior baffle.
- **Must be used with an equal or greater amount of soffit ventilation.**
- Minimum 3/12" roof pitch (up to 16/12").
- Use with standard 12" (0.3 meter) wide cap shingles.
- Florida Building Code approved.

### PRODUCT DATA\*

Width	14" (0.36 meters)
Length	25' roll (7.62 meters)
Thickness	5/8" (1.59 centimeters)
Weight	14.5 lbs. per carton (6.58 kg)
Color	Black
1 roll per carton =	25' per carton
18 cartons per skid =	450' per skid
Net free area per linear foot	12.75 square inches (82.26 square centimeters)



Xtractor Vent XLP Turbo

# ROLL VENT®

## CONTINUOUS RIDGE VENT

- See-through hinge for centering over the ridge.
- Innovative design used for shingle-over ventilation.
- Nylon 6 plus carbon black with nonwoven nylon-polyester.
- 2½" nails and nail line provided.
- Lightweight, easy-to-cut material.
- Compression-resistant design creates a stiffer nailing area and smooth finish.
- Requires no special tools, baffles, metal connectors, end caps or special filters.
- Breathable.
- **Must be used with an equal or greater amount of soffit ventilation.**
- Florida Building Code approved.

### PRODUCT DATA\*

	20'	50'
Width	10½" (0.267 meters)	10½" (0.267 meters)
Length	20' (6.1 meters)	50' (15.24 meters)
Thickness	15/16" (2.38 centimeters)	
Weight	5.0 lbs. (2.27 kg)	13.0 lbs. (5.90 kg)
10½" x 20'	5 rolls per bag 8 bags per skid	= 100' per bag = 800' per skid
10½" x 20'	2 rolls per bag 12 rolls per skid	= 100' per bag = 1,200' per skid
Net free area per linear foot	18 square inches (116.1 square centimeters)	



Roll Vent

## RAPID RIDGE®

### NAIL GUN-ABLE CONTINUOUS RIDGE VENT

- Installs with pneumatic roofing nail gun.
- See-through hinge for centering over the ridge.
- Innovative design used for roof ventilation.
- Nylon 6 plus carbon black for UV resistance with nonwoven nylon-polyester.
- Lightweight, easy-to-cut material.
- Compression-resistant design creates a stiffer nailing area and smooth finish.
- 1¾" collated nails and nail line provided for installation.
- Requires no baffles, metal connectors, end caps or special filters.
- **Must be used with an equal or greater amount of soffit ventilation.**
- Florida Building Code approved.

PRODUCT DATA*	20'	50'
Width	10½" (0.267 meters)	10½" (0.267 meters)
Length	20' (6.1 meters)	50' (15.24 meters)
Thickness	5/8" (1.59 centimeters)	
Weight	4.8 lbs. (2.18 kg)	12.5 lbs. (5.67 kg)
10½" x 20'	5 rolls per bag 8 bags per skid	= 100' per bag = 800' per skid
10½" x 20'	2 rolls per bag 12 rolls per skid	= 100' per bag = 1,200' per skid
Net free area per linear foot	12.5 square inches (80.64 square centimeters)	

## QUICKVENT®

### CONTINUOUS RIDGE VENT

- Installs with pneumatic roofing nail gun.
- See-through hinge for centering over the ridge.
- Innovative design used for ventilation.
- Classic style ridge vent made from nylon matrix technology.
- Lightweight, easy-to-cut material.
- Compression-resistant design creates a stiffer nailing area and smooth finish.
- 1¾" collated nails for installation.
- Requires no baffles, metal connectors, end caps or special filters.
- **Must be used with an equal or greater amount of soffit ventilation.**

PRODUCT DATA*	20'	50'
Width	10½" (0.267 meters)	10½" (0.267 meters)
Length	20' (6.1 meters)	50' (15.24 meters)
Thickness	3/5" (1.52 centimeters)	
Weight	4.8 lbs. (2.18 kg)	12.5 lbs. (5.67 kg)
10½" x 20'	36 rolls per skid = 720' per skid	
10½" x 20'	16 rolls per skid = 800' per skid	
Net free area per linear foot	13.5 square inches (80.64 square centimeters)	



Rapid Ridge



QuickVent



## BUILDING PRODUCTS FOR THE PROFESSIONAL

TAMKO Building Products LLC is a leading independent manufacturer of building products, crafted with American pride for more than 75 years. At TAMKO, quality building products are backed by a brand name recognized for its rich history, core values of honesty and integrity, culture of continuous improvement, authority with building professionals and support for its community. With a cornerstone of residential roofing, TAMKO's business includes the well-known brands of Heritage® Series laminated asphalt shingles, Elite Glass-Seal® asphalt shingles, MetalWorks® steel shingles, Awaplan® roll roofing, CoolRidge® ventilation, Synthetic Guard™ and Moisture Guard® underlayments and the TW line of waterproofing products. For more information about TAMKO, visit our website at [www.TAMKO.com](http://www.TAMKO.com).



Information included in this brochure was current at the time of printing. To obtain a copy of the most current version of this brochure, visit us online at [tamko.com](http://tamko.com) or call us at 1-800-641-4691.

©2020 TAMKO Building Products LLC



1-800-641-4691  
[tamko.com](http://tamko.com)

TAMKO, TAMKO logo, Heritage, Elite Glass-Seal, MetalWorks, Awaplan, CoolRidge, Moisture Guard, and QuickVent are registered trademarks of TAMKO Building Products LLC. Synthetic Guard is an unregistered trademark of TAMKO Building Products LLC. Roll Vent, Rapid Ridge and Xtractor Vent are registered trademarks of Benjamin Obdyke Incorporated.